


Mains Powered Alarm

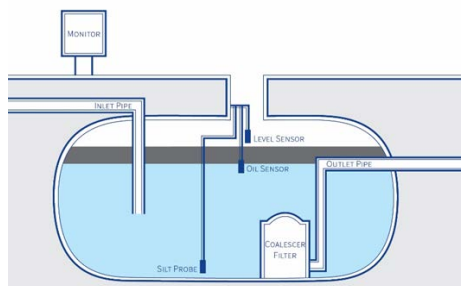

Specification

Mains Powered: 230VAC

IP65 ABS Enclosure 180 x 180 x 60mm

Output: Clean Contact Relay

Display: Liquid Crystal

Alarm: Audible (local)

Probe Range: 200 metres max. (Dependent on cable style)

Atex approved: Baseefa 08ATEX0110/1

Specific Marking of Explosion Protection: Ex II (1) G [Ex ia Ga] IIC (-20°C ≤ Ta ≤ +50°C)

Compatible probe types:

High Oil - conductivity or specific gravity

High Liquid - optical or float switch

Silt - optical

Ideal for new build sites or where mains supply is readily and easily available, making installation efficient and cost effective. This unit has an audible alarm and a liquid crystal display and is operated by means of a simple push switch. An output relay is provided which allows the use of an external sounder or beacon and can also be connected to your building management system (BMS).

Alarm warnings allow you time to take corrective action ensuring the safe and economic operation of separators preventing oil passing through the separator and polluting watercourses which may result in expensive fines and clean up costs.

Aquasentry can tailor your Separator Alarm to your requirements by displaying your name and contact details on the liquid crystal display and fitting your custom label (please ask for details).

The alarm system and sensors guarantee an increased level of safety and requires simple installation for bespoke monitoring of oil and petrol separators.

- > Warn of excessive levels of oil, liquid and silt
- > Tells you when separator needs emptying
- > Reduces waste management costs
- > Designed to comply with EN858-1 and 2
- > Can be fitted to interceptors from all manufacturers
- > Reduces interceptor servicing costs
- > Ensures safe and economic operation of interceptors